




FLOOR STANDING STORAGE TANKS WITH TWO HEAT EXCHANGERS

EV 7/5 S2 200 60

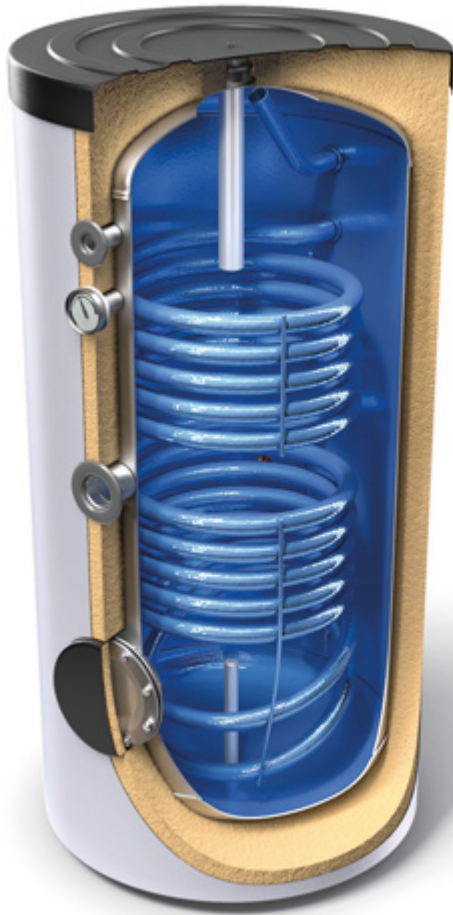

Energy class	B
Maximum operational temperature	95 °C
Capacity	200 L
Continuous flow rate of DHW at ΔT 35°C (S1) *60-80/70-90°C	558/648 L/h
Exchanged power in continuous mode (max coil output) S2 *60-80 / 70-90°C	13/20 kW
Heat losses ΔT 45K	1.4 kWh/24h
Rated pressure of the water tank	8 bar
Heat exchanger capacity S2	3.3 L
Thermo pocket	2 pieces



Continuous flow rate of DHW at ΔT 35°C (S2) *60-80 / 70-90°C	318/468 L/h
NL factor S1	4.1
NL factor S2	1
Minimum time of heating S2 *80°C-**15/60°C	39
Net weight	70 kg
Exchanged power in continuous mode (max coil output) S1 *60-80/70-90°C	23/30 kW
Maximum quantity of drawn oñ water MIX 45°C (**15-60°C), Power input cut oñ (S1)	225 L
Heat exchanger capacity S1	4.6 L
Rated pressure of the heat exchanger	6 bar
Insulation (rigid PU)	50 mm
Minimum time of heating S1 *80°C-**15/60°C	39
Maximum quantity of drawn oñ water MIX 45°C (**15-60°C), Power input cut oñ (S2)	111 L
Heat exchanger surface S1	0.75
Heat exchanger surface S2	0.54



Information

Floor standing storage tanks with two heat exchangers

EV 7/5 S2 200
60

- High-quality enamel coating ensuring long operating life
- Highly efficient PU insulation
- Efficient anode protection
- Service flange for easy inspection of the appliance
- Option for installation of an electric heating element
- Option for installation of a thermal regulator
- Option for installation of a thermal sensor

Serie information

Floor standing storage tanks with two heat exchangers

EV 7/5 S2 200
60

The range includes models with volumes from 160 up to 2000 liters with two heat exchangers. Suitable to cover the demands of a single and multi-family residential buildings or industrial needs.